



High Performance Elements inside



## Features

- Elements are assembled by the help of a tie rod system
- Two external float drains for maximum drainage
- Unique design for pre-separation zone
- Strong welded design
- CE and ASME tanks available
- Design for easy element change from top flange

## External Float Drain

Mikropor external drains are designed to remove liquid condensation from collection points in a Compressed Air System. Durable epoxy powder-coat finish and corrosion resistant internal anodised coating for longer service life.




## Technical Specifications

Model	Drain Port Size	Inlet/Outlet Port Size	Flow Rate		Max. working pressure (barg)	Element Model	Number of Elements	Housing Dimensions (mm)				
			(m³/h)	(scfm)				A	B	C	D	E
F2500	1/2"	DN80	2500	1470	14	M1200	2	450	1287	277	747	650
F3200	1/2"	DN100	3200	1880	14	M1200	3	450	1317	277	767	650
F4300	1/2"	DN100	4300	2530	14	M1200	4	530	1344	279	769	650
F6500	1/2"	DN150	6500	3825	14	M1200	6	580	1425	331	796	650
F8500	1/2"	DN150	8500	5000	14	M1200	8	650	1439	333	798	650
F11000	1/2"	DN200	11000	6470	14	M1200	10	750	1504	365	825	650
F14000	1/2"	DN200	14000	8235	14	M1200	14	800	1545	383	833	650
F17000	1/2"	DN250	17000	10000	14	M1200	16	850	1583	417	862	650
F21000	1/2"	DN300	21000	12350	14	M1200	17	850	1680	447	887	650
F25500	1/2"	DN350	25500	15000	14	M1200	23	850	1778	487	917	650
F30000	1/2"	DN350	30000	17650	14	M1200	28	850	1778	487	917	650

Specifications	Pre Filtering	General Purpose	Oil Removal	Activated Carbon
Grade	<b>P</b>	<b>X</b>	<b>Y</b>	<b>A</b>
Particle Removal (Micron)	5	1	0,01	0,01
Max. Oil carryover at 21°C (mg/m³)	5	0,5	0,01	0,003
Max. working temperature (°C)	80	80	80	25
Initial pressure loss (mbar)	40	80	100	80
Pressure loss for element change (mbar)	700	700	700	700
Element colour code	WHITE	WHITE	WHITE	METAL SS

DRAIN TYPE
Electro - adjustable
External float type
Zero-loss Drain
Manual

Minimum clearance for element change

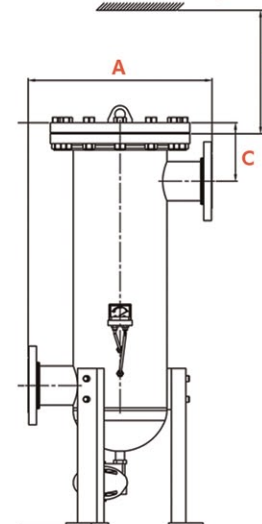

## Correction Factor

Operating Pressure (barg)	1	3	5	7	9	11	13	14
PSIG	15	44	73	100	131	160	189	200
Correction Factor	0,5	0,71	0,87	1	1,12	1,22	1,32	1,38

For maximum flow rate, multiply model flow rate show in the above table by the correction factor corresponding to the working pressure.

### NOTES:

- 1) Grade A must not operate in oil saturated conditions.
- 2) Grade A elements should be replaced periodically to suit the applications but must be changed at least every six months.
- 3) Grade A will not remove certain gases including carbon monoxide and carbon dioxide. Please refer to works if in doubt.
- 4) Flow rates are based on a 7 bar operating pressure, for flows at other pressures use correction factor given above.
- 5) All filters are suitable for use with mineral and synthetic oils.
- 6) Other standards for flanged connections are available.
- 7) Direction of air flow, inside to out, through filter element

### ORDERING:

The complete filter model number contains the size and grade, Example - pipe size NW100 oil removal filter with model filter 3200MY replacement filter element model M1200Y.